

AGRI SPECIAL

Solar Water Heating

A Brighter Energy Future

Normal Wholesale Price - €1,499

Limited 2 Panel Solar Kit Offer - €999 inc vat*

Kit includes:

2 x Pulsar Flat Plate Solar Collector

1 x Pulsar 20/6 Twin-Line Pump Station

1 x Pulsar 0301 Solar Controller

1 x Pulsar 2P Plus Mounting Kit

*Government grant €900 approx, so Net Material Cost just €99 if installed by an SEI registered user.

Call: 1850 315 315
www.pulsarrenewables.com

Did you Know.....

- Up to 70% of our domestic hot water can be supplied by solar power
- It saves you money using free energy from the sun to heat your water
- It helps the environment by reducing greenhouse gas emissions
- It saves up to 65% of your electricity bill for producing hot water or up to 50% of your oil bill.

Pulsar direct is the largest wholesale supplier of solar systems & equipment in Ireland today. Our products are certified to the highest standards and come with a 5 year warranty. We are here to assist you so call us now on **1850 315 315** and we will be glad to help.

- Free On-site Survey,
- Free Design and Quotation Service for larger systems
- Guaranteed Next Day Nationwide Delivery

Pulsar direct, We offer more!



*Terms & conditions apply

*Delivery charge is not included

Pulsar™
RENEWABLES


**2 PANEL
 SOLAR KIT
 from only
 €999*** inc Vat






Pulsar Flat Plate Solar collector

- Black Chromed coating has higher absorption rate to ensure the high efficiency even in winter or overcast days.
- Special anodized aluminium alloy frame to ensure aesthetic appearance and can accept high pressure without leakage.
- 50mm fiberglass insulation and EPDM seal strip to assure the solar collector can work under harsh and very cold temperature.
- Operation Temperature $-33^{\circ}\text{C} \sim 120^{\circ}\text{C}$.
- Pattern tempered glass (4mm) or low-iron pattern tempered glass (3.2mm) is not easily broken and with very high transmission and low emission to ensure high solar yields.
- Solar Keymark certified

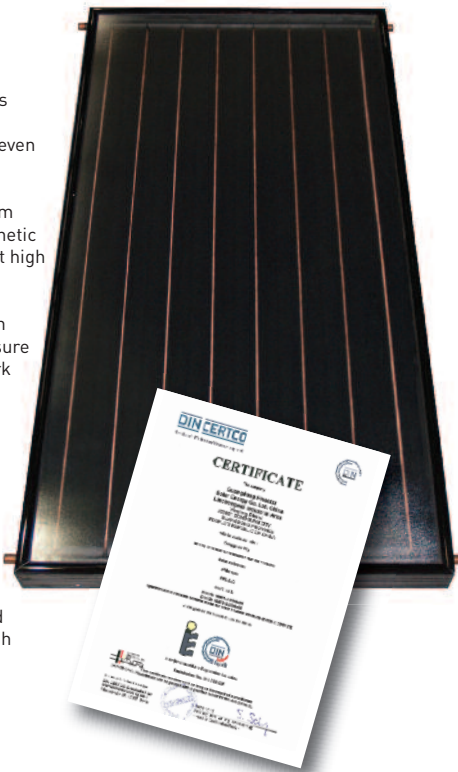

Pulsar 20/6 Twin-Line Pump Station

- Maximum operating temperature in flow branch: 160°C
- Maximum operating temperature in return branch: 110°C .
- Maximum operating temperature in safety valve: 160°C .
- Hydraulic unit for collector fields of up to 16 m^2 .
- Safety valve calibration: 6 bar
- Thermometer temperature range: $0-120^{\circ}\text{C}$.
- Flow indication range: 2-12 l/min.
- Manometer scale: 0-10 bar.
- Connections: $3/4''\text{H}$.
- Distance between branches: 95 mm.

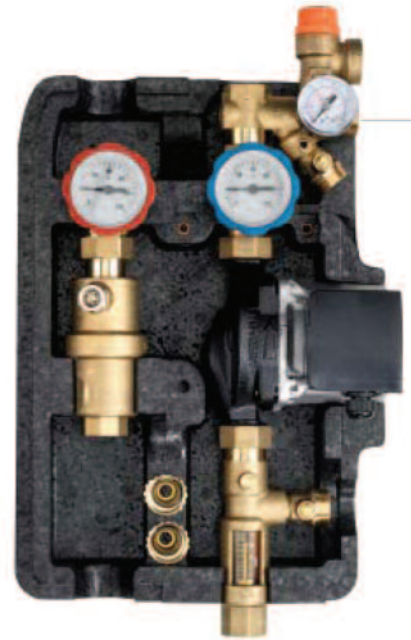

Pulsar 0301 Solar Controller



The controller 0301 was the first controller on the market to be equipped with a graphic display, on which an animated solar circuit of a solar energy system fully indicates the operating mode of the system. The consistent use of pictograms on the clearly arranged display ensures easy operation.

- Backlight LCD-Display
- Animated representation of solar system functions
- Compact, 3 piece designer case
- Tube collector function
- Holiday (storage re-cool) function
- Limitation of storage tank temperature
- Temperature display $^{\circ}\text{C} / ^{\circ}\text{F}$
- 3 Inputs - 1 Output

Pulsar 2P Plus Mounting Kit



- Universal Flat Plate Mounting Kit
- Height up to 2200mm, Width up to 1100mm, Depth up to 110mm
- Made from High Strength Lightweight Aluminium
- Complete Kit for Easy Installation

Contact us now for more details

t: 1850 315 315 e: sales@pulsardirect.com
www.pulsardirect.com

Reliability by Design

*Limited offer
Don't
miss out!*

